




XLR Pin	Core Coloured Heatshrink
1	1 (Red)
2	2 (Green)
3	3 (Blue)
4	4 (White)
5	5 (Yellow)
6	N/C
7	N/C
8	6 (Black)
9	N/C
10	N/C

**Cut Green/Yellow Core back as it is not used**

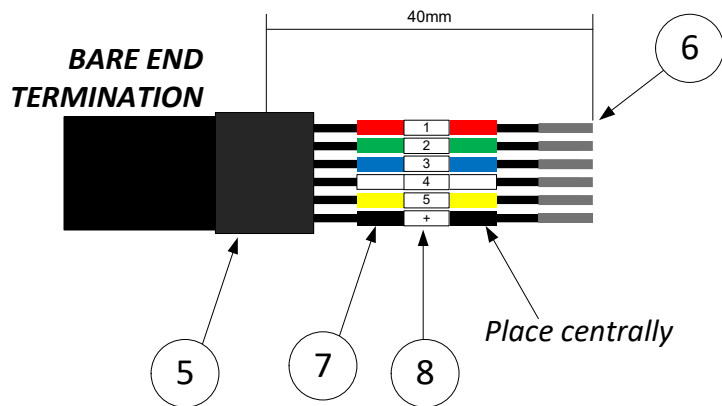

**Male - Outside Face**

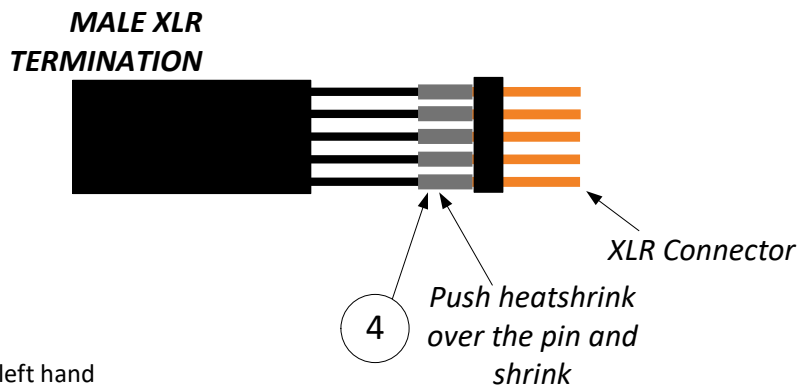

NOT TO SCALE

**Light Fantastic Specification**

ITEM	PART NO	DESCRIPTION	QTY
8	Free Issue	3.2mm Printed Heatshrink (1-5, +)	6
7	Specified in BOM	3.2mm x 25mm Coloured Heatshrink <i>See table</i>	6
6	Specified in BOM	0.75mm x 10mm Uninsulated Ferrule	6
5	Specified in BOM	12.7mm x 20mm Black Heatshrink <i>Use on bare end only</i>	1
4	Specified in BOM	3.2mm x 10mm Black Heatshrink (used on all pins)	6
3	Specified in BOM	12.7mm x 100mm Clear Heatshrink (Leave unshrunk)	1 or 2 **
2	Specified in BOM	PVC 7 Core 0.75mm Sq Number Coded Black Multicore	L*
1	Specified in BOM	Neutrik 8+2 Pole Black Male XLR Connector	1

**NOTES:**

- Text should read correctly if connector held in left hand
- \* cable is cut at length specified. Total length will vary on connectors used
- \*\* Clear heatshrink on male end only for under 5m otherwise on both ends